





## When you need it **NOW**

### QUICK SHIP SOLUTIONS

Offering more colors and styles than ever before. Our Quick Ship program provides instant access to hundreds of ready-to-order products that address even the tightest project schedules.

All products are available to ship within 10 business days, with many in stock and ready to ship immediately.

### BROADLOOM

Up to 2,000 sq. yds. of selected styles are available in 10 business days.

### CARPET TILE

Up to 2,000 sq. yds. available in 10 business days.

### LVT

Up to 10,000 sq. ft. available in 10 business days.

### RESILIENT SHEET

Up to 2,000 sq. yds. available in 10 business days.

# BROADLOOM



COMMINGLE - 989, BLACK VELVET



Up to 2,000 sq. yds. available within 10 business days or less



881 - TOBACCO



579



837



881



883



928



999



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	ALMA MATER
<b>STYLE NUMBER</b>	1E61
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.150"

<b>STITCHES PER INCH</b>	8.7
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	5176
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 83878

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



# Astonishing View



878 - BRIGHT IDEAS



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	ASTONISHING VIEW	<b>STITCHES PER INCH</b>	11.3
<b>STYLE NUMBER</b>	2B47	<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® NYLON	<b>DENSITY</b>	6769
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP	<b>DYE METHOD</b>	SOLUTION / SPACE DYED YARN
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.117"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)


**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



872 - FIREWALL



**PRODUCT SPECIFICATIONS**

 Up to 2,000 sq. yds. available within 10 business days or less

<b>STYLE NAME</b>	CHARGED
<b>STYLE NUMBER</b>	1C75
<b>FIBER TYPE</b>	COLORSTRAND® NYLON
<b>SURFACE APPEARANCE</b>	ENHANCED GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.147"


<b>STITCHES PER INCH</b>	11.0
<b>PILE WEIGHT</b>	20 OZ / YD <sup>2</sup>
<b>DENSITY</b>	4898
<b>DYE METHOD</b>	SOLUTION / SPACE DYED YARN
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



868 - BROWNSTONE




585



641



868



879



979



999



Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	CLOISONNE II	<b>STITCHES PER INCH</b>	10.0
<b>STYLE NUMBER</b>	5342	<b>PILE WEIGHT</b>	28 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® NYLON	<b>DENSITY</b>	5200
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP	<b>DYE METHOD</b>	SOLUTION / YARN
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.140"		


**FLAMMABILITY:** PIII Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)







989 - BLACK VELVET




131




585



878



968



989



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	COMMINGLE	<b>STITCHES PER INCH</b>	12.0
<b>STYLE NUMBER</b>	2B66	<b>DENSITY</b>	5838
<b>FIBER TYPE</b>	COLORSTRAND® NYLON	<b>DYE METHOD</b>	SOLUTION / YARN
<b>SURFACE APPEARANCE</b>	TEXTURED PATTERN LOOP	<b>BACKING</b>	WELDLOK®
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
<b>GAUGE</b>	1/12"		
<b>PILE THICKNESS</b>	.111"		


**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)






878 - ENVISION



521



589




841



858



869



878



979



Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	CONTEMPLATE
<b>STYLE NUMBER</b>	2B65
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.146"

<b>STITCHES PER INCH</b>	12.0
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	5425
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



869 - HICKORY



748



832



852



869



968



979



Up to 2,000 sq. yds. available within 10 business days

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	DEFENDER 20
<b>STYLE NUMBER</b>	6350
<b>FIBER TYPE</b>	PERMASTRAND™
<b>SURFACE APPEARANCE</b>	LEVEL LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.140"

<b>STITCHES PER INCH</b>	9.67
<b>PILE WEIGHT</b>	20 OZ / YD <sup>2</sup>
<b>DENSITY</b>	5220
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 3878

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** 10 Year Limited Wear Warranty, 10 Year Limited Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), 10 Year Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	DEFENDER 26
<b>STYLE NUMBER</b>	6355
<b>FIBER TYPE</b>	PERMASTRAND™
<b>SURFACE APPEARANCE</b>	LEVEL LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.163"


<b>STITCHES PER INCH</b>	11.5
<b>PILE WEIGHT</b>	26 OZ / YD <sup>2</sup>
<b>DENSITY</b>	5885
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 3878

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** 10 Year Limited Wear Warranty, 10 Year Limited Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), 10 Year Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



869 - VIVID VISION



521



589



841



858



869



979



878



Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	DISTINCTIVE APPEAL
<b>STYLE NUMBER</b>	2B76
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	TEXTURED PATTERNED LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/12"
<b>PILE THICKNESS</b>	.081"

<b>STITCHES PER INCH</b>	11.7
<b>DENSITY</b>	7111
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK® PLUS
<b>INDOOR AIR QUALITY</b>	GLP 8216


**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Edge Ravel, Zippering, Delamination And Dimensional Stability, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants





521 - LIMITLESS POTENTIAL




521



589




841



869



878



979



858



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	ENDURING FUNCTION	<b>STITCHES PER INCH</b>	12.0
<b>STYLE NUMBER</b>	2B77	<b>DENSITY</b>	5592
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DYE METHOD</b>	SOLUTION
<b>SURFACE APPEARANCE</b>	TEXTURED PATTERNED LOOP	<b>BACKING</b>	WELDLOK® PLUS
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
<b>GAUGE</b>	1/12"		
<b>PILE THICKNESS</b>	.103"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Plus Warranty, Lifetime Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



872 - FIREWALL



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	ENERGIZED	<b>STITCHES PER INCH</b>	11.33
<b>STYLE NUMBER</b>	1C70	<b>PILE WEIGHT</b>	20 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® NYLON	<b>DENSITY</b>	5669
<b>SURFACE APPEARANCE</b>	ENHANCED GRAPHIC LOOP	<b>DYE METHOD</b>	SOLUTION / YARN
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.127"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



862 - DESERT SCENE



128



378



585



595



858




862



888



969



989



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	GLOBAL IMAGE
<b>STYLE NUMBER</b>	1F01
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.110"

<b>STITCHES PER INCH</b>	14.67
<b>PILE WEIGHT</b>	20 OZ / YD <sup>2</sup>
<b>DENSITY</b>	6545
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance





878 - BRIGHT IDEAS



521



589



841




858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	INSPIRING MOMENT
<b>STYLE NUMBER</b>	2B46
<b>FIBER TYPE</b>	COLORSTRAND® NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.126"

<b>STITCHES PER INCH</b>	11.7
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	6286
<b>DYE METHOD</b>	SOLUTION / YARN
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



876 - NORTH WOODS



852



876



878



988



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	INTERPLAY	<b>STITCHES PER INCH</b>	10.33
<b>STYLE NUMBER</b>	4454	<b>PILE WEIGHT</b>	22 OZ / YD2
<b>FIBER TYPE</b>	COLORSTRAND® NYLON	<b>DENSITY</b>	6656
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP	<b>DYE METHOD</b>	SOLUTION / YARN
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.119"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

## Major Factor



959 - TITANIUM



846



847



959



968



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

### PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	MAJOR FACTOR
<b>STYLE NUMBER</b>	1Y09
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/8"
<b>PILE THICKNESS</b>	.110"

<b>STITCHES PER INCH</b>	10.2
<b>PILE WEIGHT</b>	20 OZ / YD2
<b>DENSITY</b>	6545
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants





988 - NIGHT GLOW



852



876



878



988



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	POINT GUARD	<b>STITCHES PER INCH</b>	10.0
<b>STYLE NUMBER</b>	4412	<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND <sup>®</sup> NYLON	<b>DENSITY</b>	6712
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP	<b>DYE METHOD</b>	SOLUTION / YARN
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK <sup>®</sup>
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.118"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



878 - COLLECTIVE WISDOM



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	PURE & SIMPLE
<b>STYLE NUMBER</b>	2B48
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.097"

<b>STITCHES PER INCH</b>	12.0
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	8165
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



714 - HAZY HUE



559



679



714




822




828



837



838



928



958



959



978



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	REAL ELEMENTS
<b>STYLE NUMBER</b>	1Z26
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.116"

<b>STITCHES PER INCH</b>	11.0
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	6828
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants





878 - REDEFINED



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	REPLENISH	<b>STITCHES PER INCH</b>	11.6
<b>STYLE NUMBER</b>	2B62	<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® NYLON	<b>DENSITY</b>	5617
<b>SURFACE APPEARANCE</b>	TEXTURED PATTERNED LOOP	<b>DYE METHOD</b>	SOLUTION / YARN
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.141"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



878 - REDEFINED



841



878



979



858



589



869



521



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	REPURPOSE	<b>STITCHES PER INCH</b>	11.6
<b>STYLE NUMBER</b>	2B61	<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® NYLON	<b>DENSITY</b>	5143
<b>SURFACE APPEARANCE</b>	TEXTURED PATTERNED LOOP	<b>DYE METHOD</b>	SOLUTION / YARN
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.154"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



979 - CHARCOAL



383



589



748



852



869




889




949



959



979



999



UP TO 2,000 SQ. YDS. AVAILABLE TO SHIP IN 10 BUSINESS DAYS

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	RULE BREAKER
<b>STYLE NUMBER</b>	2B94
<b>FIBER TYPE</b>	ENVIROSTRAND™ SD PET
<b>SURFACE APPEARANCE</b>	LEVEL LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS STAIN
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS SOIL
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.099"

<b>STITCHES PER INCH</b>	9.0
<b>DENSITY</b>	4716
<b>DYE METHOD</b>	100% SOLUTION DYED
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 0350

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** 10 Year Limited Wear Warranty, 10 Year Static Protection, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants.





979 - CHARCOAL



383



589



748




852



869




889




949



959



979



999



UP TO 2,000 SQ. YDS. AVAILABLE TO SHIP IN 10 BUSINESS DAYS

## PRODUCT SPECIFICATIONS

**STYLE NAME** RULE BREAKER 20

**STYLE NUMBER** 2B92

**FIBER TYPE** ENVIROSTRAND™ SD PET

**SURFACE APPEARANCE** LEVEL LOOP

**STAIN RELEASE TECHNOLOGY** MOHAWK PROTECTION PLUS STAIN

**SOIL RELEASE TECHNOLOGY** MOHAWK PROTECTION PLUS SOIL

**GAUGE** 1/10"

**PILE THICKNESS** .137"

**STITCHES PER INCH** 12.4

**PILE WEIGHT** 20 OZ / YD<sup>2</sup>

**DENSITY** 5592

**DYE METHOD** 100% SOLUTION DYED

**BACKING** WELDLOK®

**INDOOR AIR QUALITY** GLP 0350

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** 10 Year Limited Wear Warranty, 10 Year Static Protection, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants.



979 - CHARCOAL



383



589



748



852



869




889




949



959



979



999



UP TO 2,000 SQ. YDS. AVAILABLE TO SHIP IN 10 BUSINESS DAYS

## PRODUCT SPECIFICATIONS


<b>STYLE NAME</b>	RULE BREAKER 26	<b>STITCHES PER INCH</b>	12.6
<b>STYLE NUMBER</b>	2B93	<b>PILE WEIGHT</b>	26 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	ENVIROSTRAND™ SD PET	<b>DENSITY</b>	5305
<b>SURFACE APPEARANCE</b>	LEVEL LOOP	<b>DYE METHOD</b>	100% SOLUTION DYED
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS STAIN	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS SOIL	<b>INDOOR AIR QUALITY</b>	GLP 0350
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.166"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** 10 Year Limited Wear Warranty, 10 Year Static Protection, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants.



878 - ENVISION



521



878



979




589



841



858



869



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	RUMINATE
<b>STYLE NUMBER</b>	2B64
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.141"

<b>STITCHES PER INCH</b>	12.3
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	5824
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216


**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants






719 - STEEL GRAY



948



965



879



964



689



679



837




374



978



928



589



999



559



719



**QUICK SHIP**

Up to 2,000 sq. Yds. Available to ship in 10 business days

## PRODUCT SPECIFICATIONS


<b>STYLE NAME</b>	SCHOLARSHIP II	<b>STITCHES PER INCH</b>	6.8
<b>STYLE NUMBER</b>	2B99	<b>PILE WEIGHT</b>	20 OZ/YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DENSITY</b>	6101
<b>SURFACE APPEARANCE</b>	TEXTURED HEATHERED LOOP	<b>DYE METHOD</b>	100% SOLUTION DYED
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS STAIN	<b>BACKING</b>	WELDLOK®
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS SOIL	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.118"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Limited Lifetime Wear, Lifetime Static Protection, Limited Lifetime Colorfastness to Light , 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Atmospheric Contaminants.



719 - STEEL GRAY



948



965



879



964



689



679



928




374



978



589



559



999



719



**QUICK SHIP**

Up to 2,000 sq. Yds. Available to ship in 10 business days

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	SCHOLARSHIP II 26	<b>STITCHES PER INCH</b>	9.3
<b>STYLE NUMBER</b>	2B100	<b>PILE WEIGHT</b>	26 OZ/YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DENSITY</b>	5886
<b>SURFACE APPEARANCE</b>	TEXTURED HEATHERED LOOP	<b>DYE METHOD</b>	100% SOLUTION DYED
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS STAIN	<b>BACKING</b>	WELDLOK® PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS SOIL	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.159"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)


**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, Limited Lifetime Edge Ravel, Zippering, Delamination, And Dimensional Stability, Limited Lifetime Colorfastness To Light, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness To Atmospheric Contaminants.



837 - SIENNA



545



747



837



879



883



999



Up to 2,000 sq. yds. available within 10 business days

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	SCHOLARSHIP 26
<b>STYLE NUMBER</b>	6465
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.137"

<b>STITCHES PER INCH</b>	10.33
<b>PILE WEIGHT</b>	26 OZ / YD <sup>2</sup>
<b>DENSITY</b>	6832
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	SCHOLARSHIP 28
<b>STYLE NUMBER</b>	6466
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.137"

<b>STITCHES PER INCH</b>	11.0
<b>PILE WEIGHT</b>	28 OZ / YD <sup>2</sup>
<b>PILE WEIGHT</b>	7358
<b>DENSITY</b>	SOLUTION
<b>DYE METHOD</b>	WELDLOK®
<b>BACKING</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



# Scholarship Prism 26/28



928 - DUSK



559



565



738



842



928



989



Up to 2,000 sq. yds. available within 10 business days

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	SCHOLARSHIP PRISM 26
<b>STYLE NUMBER</b>	5338
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.137"

<b>STITCHES PER INCH</b>	10.33
<b>PILE WEIGHT</b>	26 OZ / YD <sup>2</sup>
<b>DENSITY</b>	6832
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	SCHOLARSHIP PRISM 28
<b>STYLE NUMBER</b>	8626
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.137"

<b>STITCHES PER INCH</b>	11.00
<b>PILE WEIGHT</b>	28 OZ / YD <sup>2</sup>
<b>DENSITY</b>	7358
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



878 - COLLECTIVE WISDOM



521



589



841



858



869



878



979



Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	SMART & SHARP
<b>STYLE NUMBER</b>	2B49
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.136"

<b>STITCHES PER INCH</b>	12.0
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	5824
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

## Surface Purpose



869 - VIVID VISION



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

### PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	SURFACE PURPOSE	<b>STITCHES PER INCH</b>	13.0
<b>STYLE NUMBER</b>	2B75	<b>DENSITY</b>	5877
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DYE METHOD</b>	SOLUTION
<b>SURFACE APPEARANCE</b>	TEXTURED PATTERNED LOOP	<b>BACKING</b>	WELDLOK® PLUS
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
<b>GAUGE</b>	1/12"		
<b>PILE THICKNESS</b>	.098"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Plus Warranty, Lifetime Limited Edge Ravel, Zippering, Delamination, And Dimensional Stability Warranty, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



# Town Center II 30




214 - WINE COUNTRY




128



214



330



729



959



979



Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	TOWN CENTER II 30
<b>STYLE NUMBER</b>	1E73
<b>FIBER TYPE</b>	COLORSTRAND® NYLON
<b>SURFACE APPEARANCE</b>	DENSE CUT PILE
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.220"

<b>STITCHES PER INCH</b>	10.33
<b>PILE WEIGHT</b>	30 OZ / YD <sup>2</sup>
<b>DENSITY</b>	4909
<b>DYE METHOD</b>	PIECE DYED
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 6678

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)

# Transversal Approach



521 - LIMITLESS POTENTIAL



521




589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	TRANSVERSAL APPROACH	<b>STITCHES PER INCH</b>	12.0
<b>STYLE NUMBER</b>	2B78	<b>DENSITY</b>	4881
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DYE METHOD</b>	SOLUTION
<b>SURFACE APPEARANCE</b>	TEXTURED PATTERNED LOOP	<b>BACKING</b>	WELDLOK® PLUS
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
<b>GAUGE</b>	1/12"		
<b>PILE THICKNESS</b>	.118"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Plus Warranty, Lifetime Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants




714 - HAZY HUE




559




679



714



822




828




837




838



928



958



959



978



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

**PRODUCT SPECIFICATIONS**


<b>STYLE NAME</b>	TRUE FORM
<b>STYLE NUMBER</b>	1Z30
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.118"

<b>STITCHES PER INCH</b>	10.7
<b>PILE WEIGHT</b>	22 OZ / YD <sup>2</sup>
<b>DENSITY</b>	6712
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 8216

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants




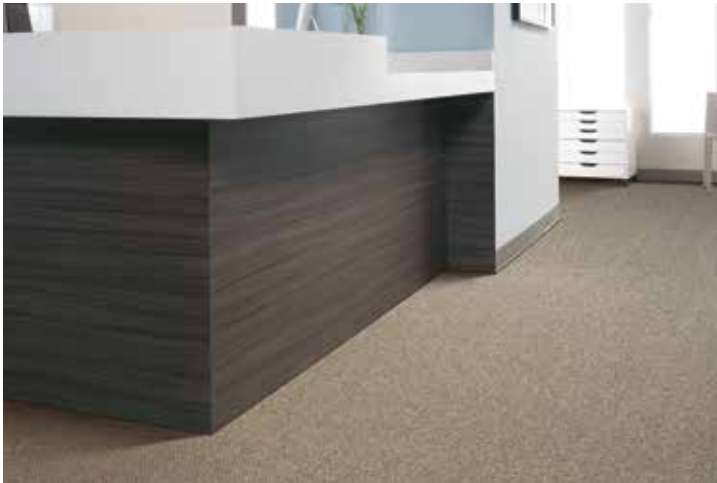

837 - SIENNA



545



747



837



879



883



999



Up to 2,000 sq. yds. available within 10 business days

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	TUITION 26	<b>STITCHES PER INCH</b>	10.33
<b>STYLE NUMBER</b>	6636	<b>PILE WEIGHT</b>	26 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DENSITY</b>	6832
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP	<b>DYE METHOD</b>	SOLUTION
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK® UNITARY
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.137"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Weldlok® Unitary Warranty, Lifetime Edge Ravel, Zippering, Delamination & Dimensional Stability, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

**PRODUCT SPECIFICATIONS**

<b>STYLE NAME</b>	TUITION 28	<b>STITCHES PER INCH</b>	11.0
<b>STYLE NUMBER</b>	6637	<b>PILE WEIGHT</b>	28 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DENSITY</b>	7358
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP	<b>DYE METHOD</b>	SOLUTION
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK® UNITARY
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.137"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Unitary Warranty, 10 Year Edge Ravel, 10 Year No Zippering, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

# Tuition Prisms 26/28



928 - DUSK



559



565



738



842



928



989



Up to 2,000 sq. yds. available within 10 business days

## PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	TUITION PRISMS 26	<b>STITCHES PER INCH</b>	10.33
<b>STYLE NUMBER</b>	8625	<b>PILE WEIGHT</b>	26 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DENSITY</b>	6832
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP	<b>DYE METHOD</b>	SOLUTION
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK® UNITARY
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.137"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, 10 Year Edge Ravel, 10 Year No Zippering

## PRODUCT SPECIFICATIONS


<b>STYLE NAME</b>	TUITION PRISMS 28	<b>STITCHES PER INCH</b>	11.00
<b>STYLE NUMBER</b>	8660	<b>PILE WEIGHT</b>	28 OZ / YD <sup>2</sup>
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON	<b>DENSITY</b>	7358
<b>SURFACE APPEARANCE</b>	TEXTURED LOOP	<b>DYE METHOD</b>	SOLUTION
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS	<b>BACKING</b>	WELDLOK® UNITARY
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT	<b>INDOOR AIR QUALITY</b>	GLP 8216
<b>GAUGE</b>	1/10"		
<b>PILE THICKNESS</b>	.137"		

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, 10 Year Edge Ravel, 10 Year No Zippering



862 - DESERT SCENE

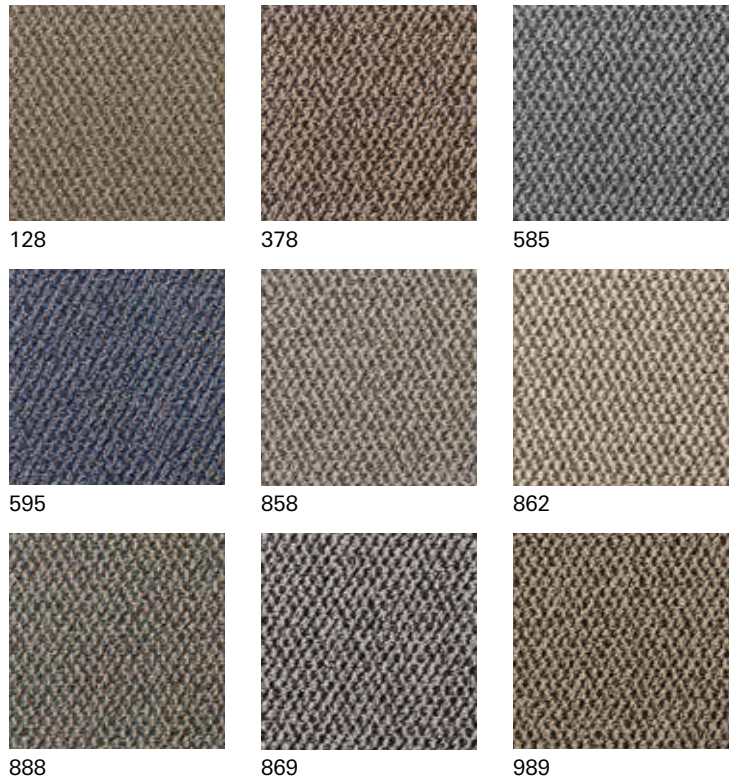

**PRODUCT SPECIFICATIONS**



Up to 2,000 sq. yds. available within 10 business days or less

<b>STYLE NAME</b>	WORLD VISION
<b>STYLE NUMBER</b>	1F06
<b>FIBER TYPE</b>	COLORSTRAND® SD NYLON
<b>SURFACE APPEARANCE</b>	GRAPHIC LOOP
<b>STAIN RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS
<b>SOIL RELEASE TECHNOLOGY</b>	MOHAWK PROTECTION PLUS - SOIL TREATMENT
<b>GAUGE</b>	1/10"
<b>PILE THICKNESS</b>	.122"

<b>STITCHES PER INCH</b>	12.0
<b>PILE WEIGHT</b>	20 OZ / YD <sup>2</sup>
<b>DENSITY</b>	5902
<b>DYE METHOD</b>	SOLUTION
<b>BACKING</b>	WELDLOK®
<b>INDOOR AIR QUALITY</b>	GLP 83878

**FLAMMABILITY:** Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

**WARRANTIES:** Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



Aladdin  
COMMERCIAL